
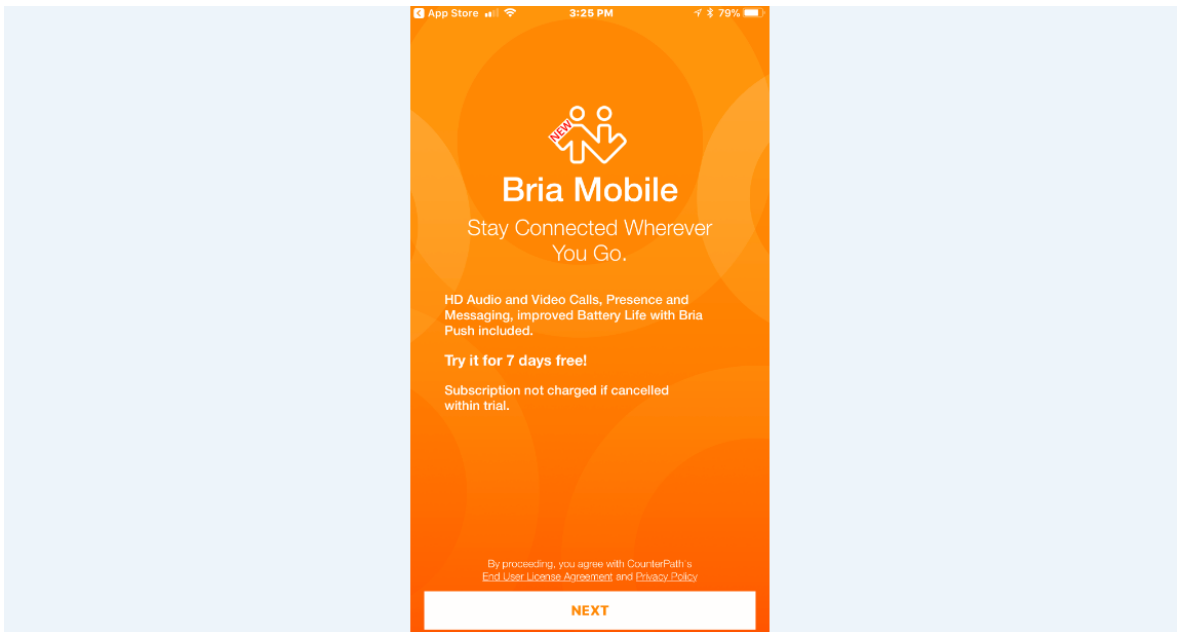


# Setting Up Bria Mobile Softphone

Step 1: Please download Bria in the Google Play Store or in iTunes.

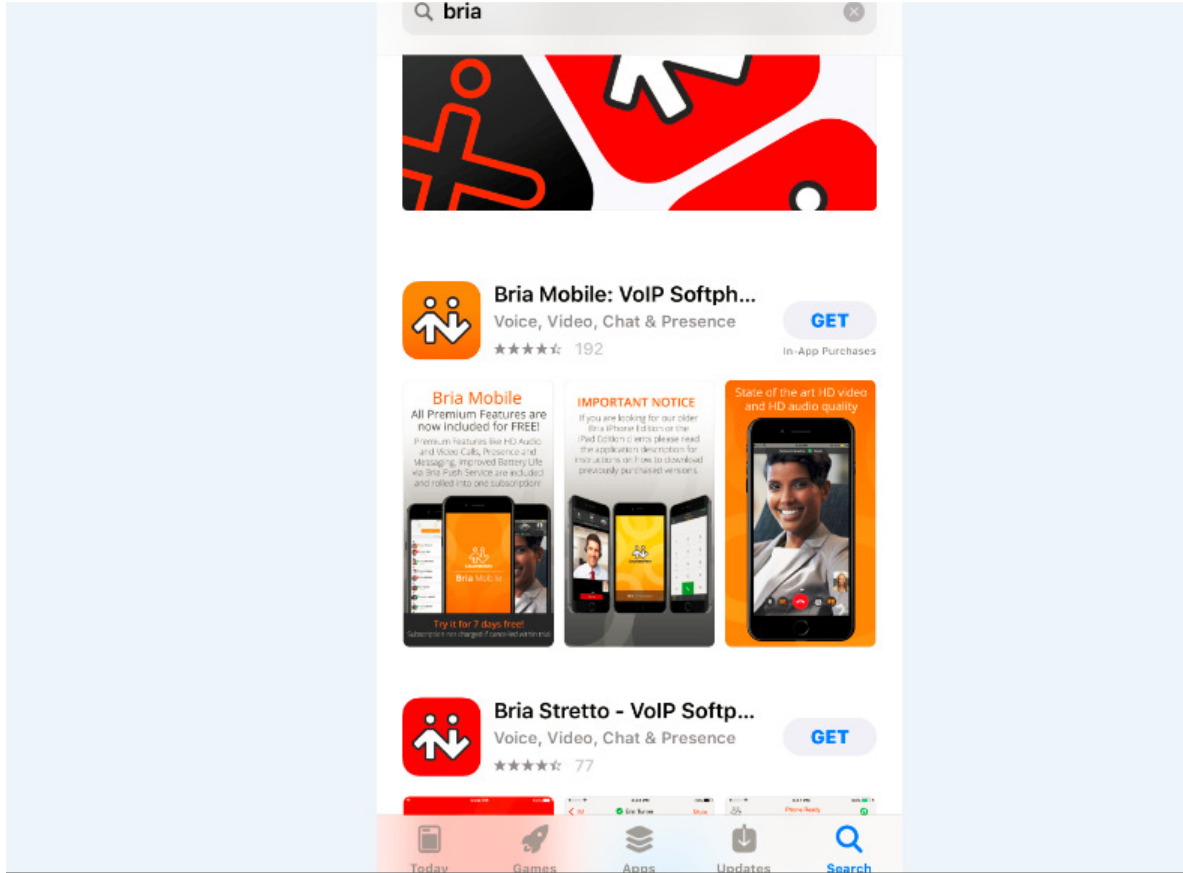

Step 2: From the Smart PBX toolbar, select Users.


The screenshot shows the LogicomUSA SMART PBX interface. The top navigation bar includes the LogicomUSA logo, a gear icon, and the text "SMART PBX". On the right, there are icons for a list, a grid, and "CRAM" with a gear icon. The main content area has a left sidebar with menu items: Dashboard, Numbers, Users (highlighted in blue), Groups, Main Number, Call Logs, and Devices. The main area displays "Total Users 14" with an "Add User" button and a search bar. Below this is a table with columns: Users Settings, Extensions, Phone Numbers, Devices, and User Features. The table contains the following data:

Users Settings	Extensions	Phone Numbers	Devices	User Features
Andres Gomez	1119	+1 908 481 9020	(+4)	
Bobby Camisa	1104	None	(+1)	
Bobby Cell	644050	None		
Bobby Soft	1300	None		
FreedomFiber TS	1110	None		
Jamie Salata	1108	None	None	


Step 3: Once you're in the Users tab, click on the specific user's Devices. Click Add Device and select Smartphone.

The screenshot shows the LogicomUSA SMART PBX interface with the "Users" tab selected. The total number of users is 10. The "Devices" column for the user "Bernie Sanders" is highlighted, and a dropdown menu is open. The dropdown menu contains the following options: SIP Phone, Cell Phone, Smartphone (highlighted in yellow), Soft Phone, Landline, Fax, and ATA. Below the dropdown menu, there is a "Save Changes" button.


Step 4: Fill out the basic fields and create the device. The SIP Username and Password will be provided, but you will need to create a device name and add your phone number.

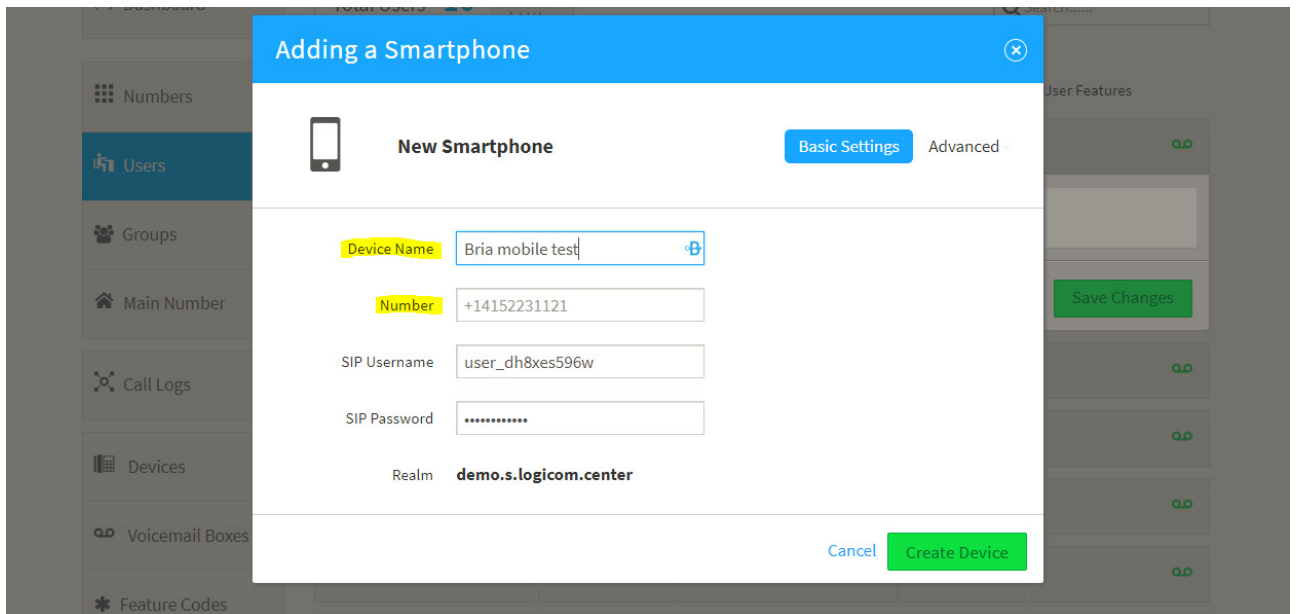

Step 5a: If First-time setup (otherwise use step 5b), Start Bria for the first time and click Add Account. You will be presented with Account Types. Near the top select "SIP Making Calls".

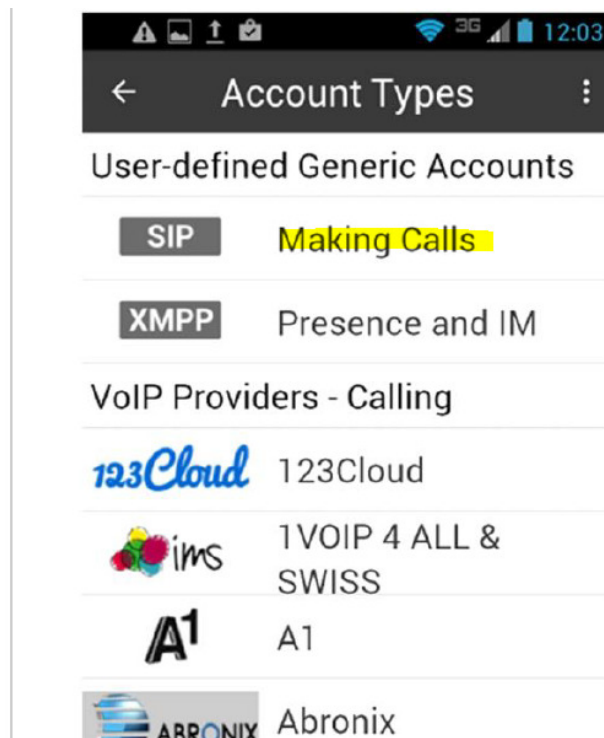


Step 5b: If an account is already setup, start Bria and click on the Settings icon the bottom bar.

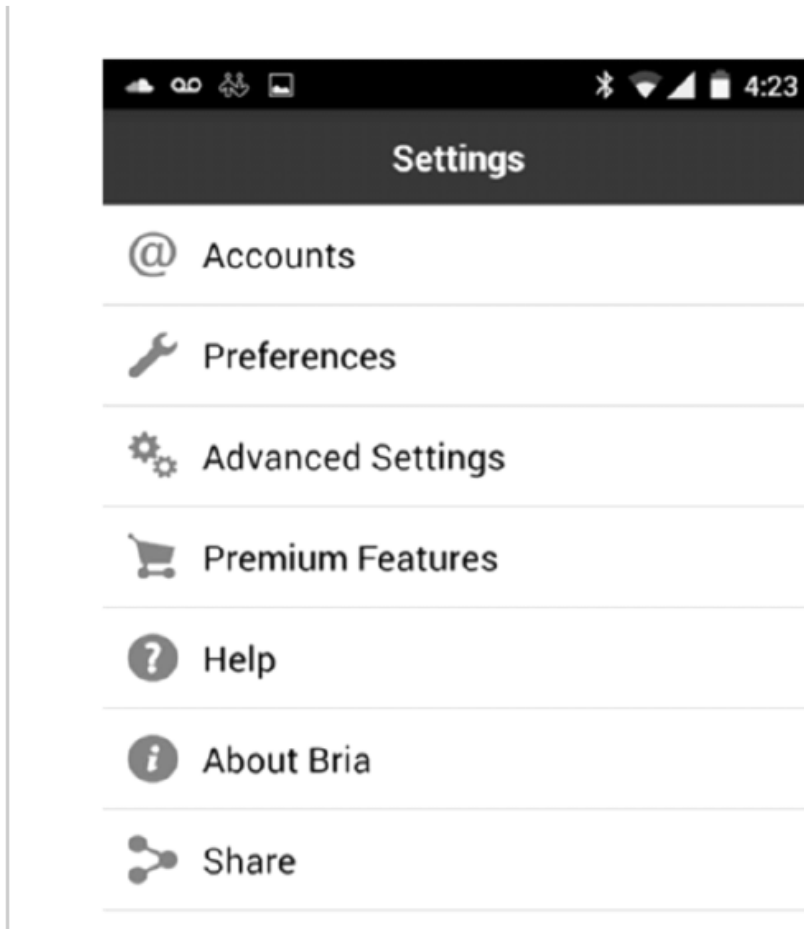

Step 6: Go into Accounts tab, and add a new Account. Fill out the User Details fields by transferring information from the Kazoo UI to Bria.  
Display As= Device Name Username =SIP Username Password= SIP Password Domain=  
Realm.

Step 7: After putting in the credentials in the last step, select the Account Advanced near the bottom of that screen\_ That will show the settings screen below.

Outbound Proxy= <empty> (unless is was given you as different than the Realm) Send DTMF using = RFC 2833 SIP Transport= UDP (usually UDP but may need to be TCP in some cases See general connection guide.) Encrypt Audio= Never Network Traversal Strategy= Custom Configuration (see next step).

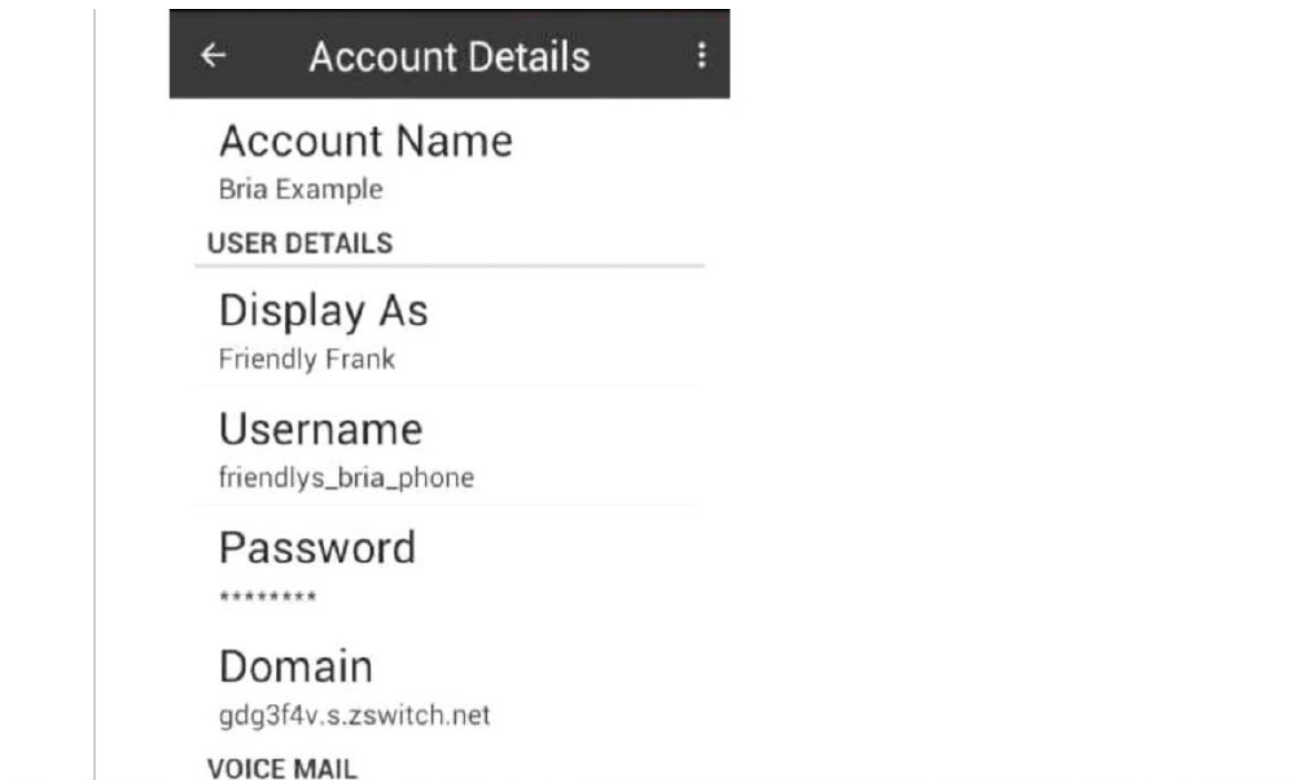


Step 8: After selecting the Network Traversal Strategy, At very top, select Strategy then choose Custom Configuration. You will now have the setting screen below. The following settings are very important to getting you mobile client working, especially using DNS SRV option.


Under SIP NETWORK TRAVERSAL

RPort Wi-Fi = checked RPort Mobile = checked Outbound Wi-Fi = checked Outbound Mobile = checked

Use STUN Wi-Fi = un-checked Use STUN Mobile = un-checked Use DNS SRV = checked (VERY IMPORTANT!!)

Under MEDIA NETWORK TRAVERSAL Use STUN Wi-Fi = un-checked Use STUN Mobile = un-checked Use ICE Wi-Fi = un-checked Use ICE Mobile = un-checked Use TURN Wi-Fi = un-checked Use TURN Mobile = un-checked.

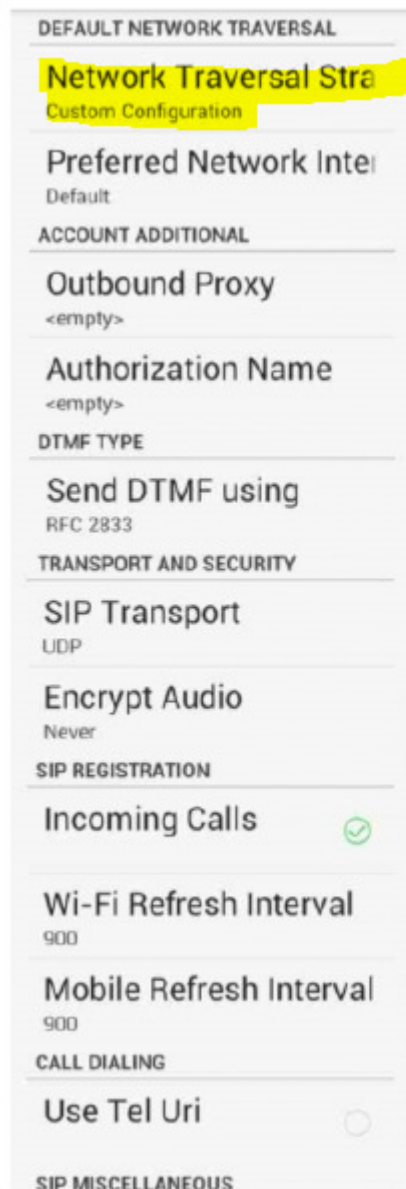

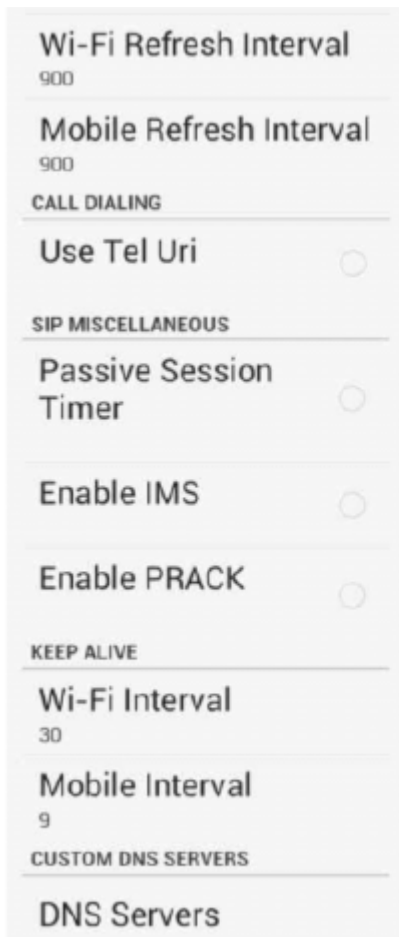

Step 9: You have now completed setting up a Mobile Softphone and can make call.

